

**DATA SHEET**


# SKY65720-11: Shielded Low-Noise Amplifier Front-End Module with GPS/GNSS/BDS Pre-Filter

## Applications

- GPS/GNSS/BDS radio receivers
- Global Navigation Satellite Systems (GLONASS)
- Fitness/activity trackers
- Smartphones
- Laptop PCs and tablets

## Features

- Innovative proprietary shielded technology
- Wideband pre-filter
- Small signal gain: 16 dB typical
- Excellent out-of-band rejection
- Low noise figure: 1.5 dB typical
- Low current consumption
- Input/output impedance internally matched to 50 Ω
- Single DC supply: 1.8 V
- Minimal number of external components required
- Small MCM (9-pin, 1.6 x 1.6 x 0.8 mm) package (MSL3, 260 °C per JEDEC J-STD-020)
- For RoHS and other product compliance information, see the [Skyworks Certificate of Conformance](#)

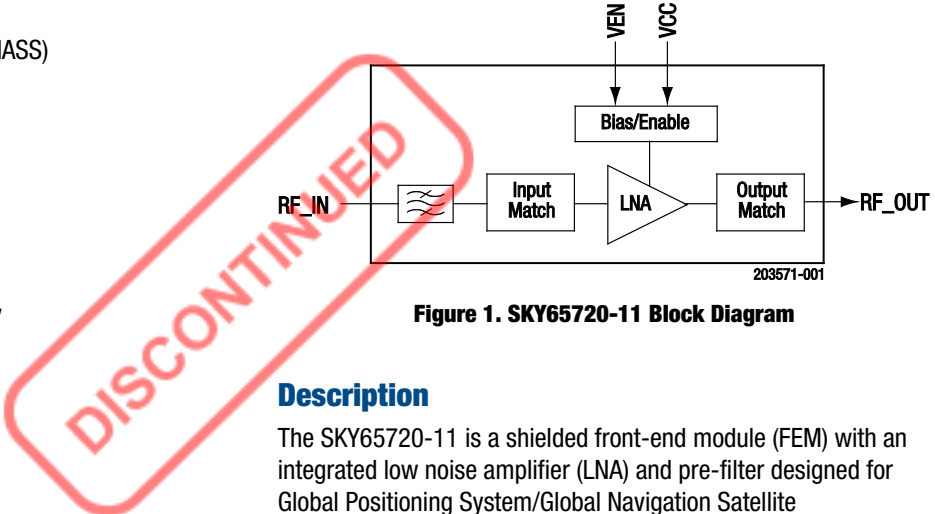


**Figure 1. SKY65720-11 Block Diagram**

## Description

The SKY65720-11 is a shielded front-end module (FEM) with an integrated low noise amplifier (LNA) and pre-filter designed for Global Positioning System/Global Navigation Satellite System/Beidou Navigation Satellite System (GPS/GNSS/BDS) receiver applications. The device provides high linearity, excellent gain, a high 1 dB input compression point (IP1dB), and a superior noise figure (NF).

The pre-filter provides the low in-band insertion loss and integrated notch filtering for excellent rejections of the cellular, PCS, and WLAN frequency bands. The SKY65720-11 uses surface-mount technology (SMT) in a 1.6 x 1.6 x 0.8 mm Multi-Chip Module (MCM) package, which allows for a highly manufacturable and low-cost solution.

A functional block diagram is shown in Figure 1. The pin configuration and package are shown in Figure 2. Signal pin assignments and functional pin descriptions are provided in Table 1.

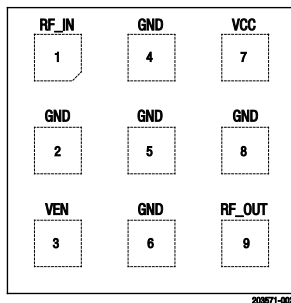

**Figure 2. SKY65720-11 Pinout (Top View)**

**Table 1. SKY65720-11 Signal Descriptions**

Pin	Name	Description	Pin	Name	Description
1	RF_IN	RF input	6	GND	Ground
2	GND	Ground	7	VCC	Supply voltage
3	VEN	LNA enable	8	GND	Ground
4	GND	Ground	9	RF_OUT	RF output
5	GND	Ground			

## Technical Description

### LNA Enable

The VEN signal (pin 3) enables or disables the LNA. A logic high signal powers on the LNA and a logic low signal powers off the device. An external series resistor can be used on this pin to adjust the LNA bias current.

## Electrical and Mechanical Specifications

The absolute maximum ratings of the SKY65720-11 are provided in Table 2. The recommended operating conditions are specified in Table 3, and electrical specifications are provided in Table 4.

**Table 2. SKY65720-11 Absolute Maximum Ratings<sup>1</sup>**

Parameter	Symbol	Minimum	Maximum	Units
RF input power	P <sub>IN</sub>		+10	dBm
Supply voltage	V <sub>CC</sub>	0	3.1	V
Storage temperature	T <sub>STG</sub>	-55	+150	°C
Junction temperature	T <sub>J</sub>		+150	°C
Electrostatic discharge: Human Body Model (HBM), Class 1A	ESD		250	V

<sup>1</sup> Exposure to maximum rating conditions for extended periods may reduce device reliability. There is no damage to device with only one parameter set at the limit and all other parameters set at or below their nominal value. Exceeding any of the limits listed here may result in permanent damage to the device.

**ESD HANDLING:** *Although this device is designed to be as robust as possible, electrostatic discharge (ESD) can damage this device. This device must be protected at all times from ESD when handling or transporting. Static charges may easily produce potentials of several kilovolts on the human body or equipment, which can discharge without detection. Industry-standard ESD handling precautions should be used at all times.*


**Table 3. Recommended Operating Conditions**

Parameter	Symbol	Min	Typ	Max	Units
Frequency range	f	1559	1575	1606	MHz
Supply voltage	V <sub>CC</sub>		1.8		V
LNA enable:					
Enable (high)	LNA <sub>ENABLE</sub>	V <sub>CC</sub> - 0.3		V <sub>CC</sub>	V
Disable (low)	LNA <sub>DISABLE</sub>		0	0.3	V
Case operating temperature	T <sub>C</sub>	-40	+25	+85	°C

**Table 4. SKY65720-11 Electrical Specifications<sup>1</sup>**  
**(VCC = 1.8 V, VEN = 1.8 V, f = 1575 MHz, Tc = +25°C, Unless Otherwise Noted)**

Parameter	Symbol	Test Condition	Min	Typ	Max	Units
Small signal gain	IS21I	PIN = -30 dBm		16		dB
Noise figure	NF			1.5		dB
In-band third order input intercept point	IIP3			-7		dBm
1 dB input compression point (in-band)	IP1dB			-15		dBm
Reverse isolation	IS12I	PIN = -30 dBm		33		dB
Input return loss	IS11I	PIN = -30 dBm		8		dB
Output return loss	IS22I	PIN = -30 dBm		15		dB
Supply current	Icc	No RF		3.8		mA
Shutdown current	Ileak	No RF, VEN = 0 V		0.1	1	uA
Out-of-band rejection	OOB	PIN = 0 dBm (in-band referred): @ 777 to 798 MHz @ 806 to 928 MHz @ 1710 to 1980 MHz @ 2400 to 2500 MHz @ 5160 to 5560 MHz		60 55 45 65 80		dBc dBc dBc dBc dBc

<sup>1</sup> Performance is guaranteed only under the conditions listed in this table.

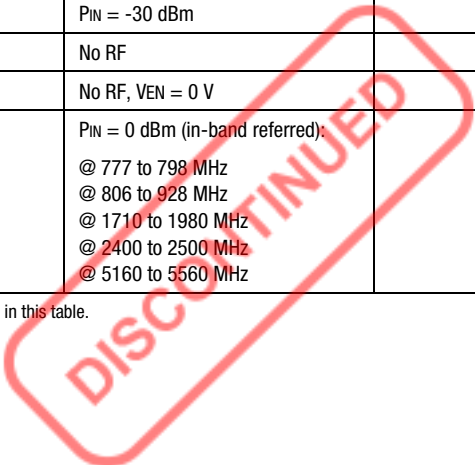

### Evaluation Board Description

An Evaluation Board is used to test the performance of the SKY65720-11 device. A schematic of the Evaluation Board is

provided in Figure 3. An assembly diagram of the Evaluation Board is shown in Figure 4.

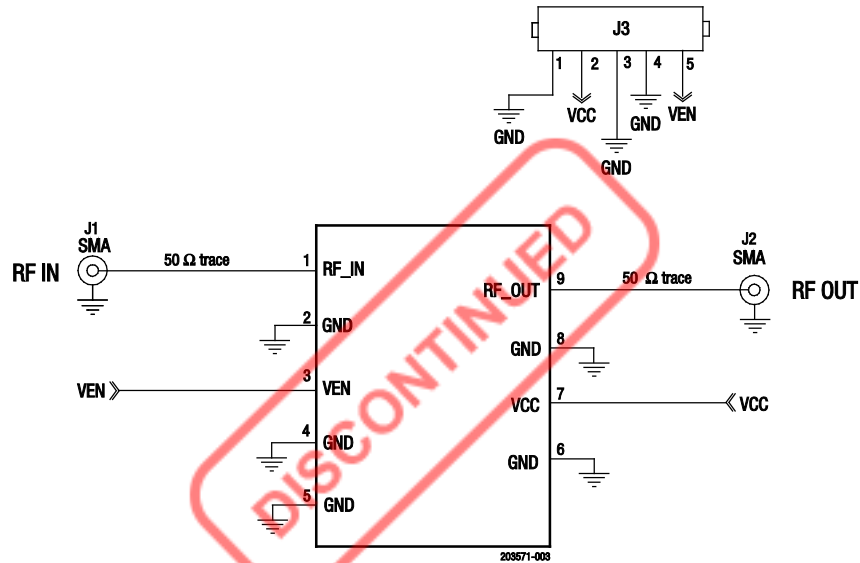


Figure 3. SKY65720-11 Evaluation Board Schematic

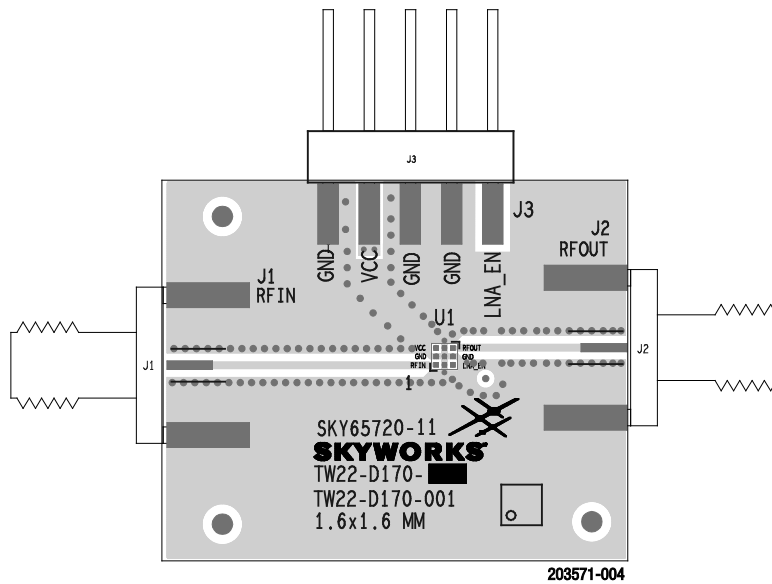


Figure 4. SKY65720-11 Evaluation Board Assembly Diagram

### Package Dimensions


The PCB layout footprint for the SKY65720-11 is provided in Figure 5. The typical part marking is shown in Figure 6. Package dimensions are shown in Figure 7, and tape and reel dimensions are provided in Figure 8.

### Package and Handling Information

Since the device package is sensitive to moisture absorption, it is baked and vacuum packed before shipping. Instructions on the shipping container label regarding exposure to moisture after the container seal is broken must be followed. Otherwise, problems related to moisture absorption may occur when the part is subjected to high temperature during solder assembly.

The SKY65720-11 is rated to Moisture Sensitivity Level 3 (MSL3) at 260 °C. It can be used for lead or lead-free soldering. For additional information, refer to the Skyworks Application Note, *PCB Design & SMT Assembly/Rework Guidelines for MCM-L Packages*, document number 101752.

Care must be taken when attaching this product, whether it is done manually or in a production solder reflow environment. Production quantities of this product are shipped in a standard tape and reel format.

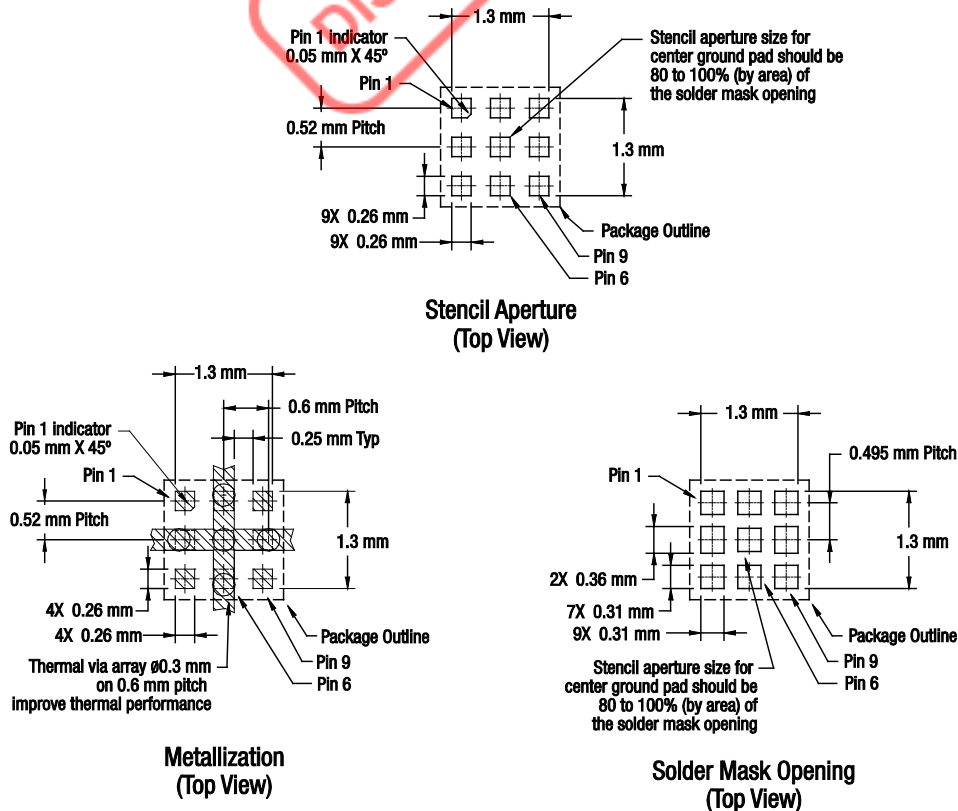

**Notes:**

1. All measurements are in millimeters.
2. Thermal vias should be resin filled and capped in accordance with IPC-4761 type VII vias. Recommended Cu thickness is 30 to 35 μm.

203571-005

**Figure 5. SKY65720-11 PCB Layout Footprint**



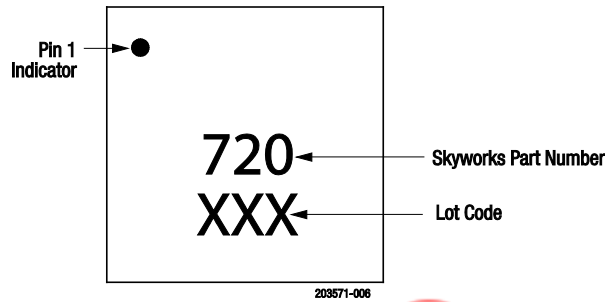


Figure 6. SKY65720-11 Typical Part Marking

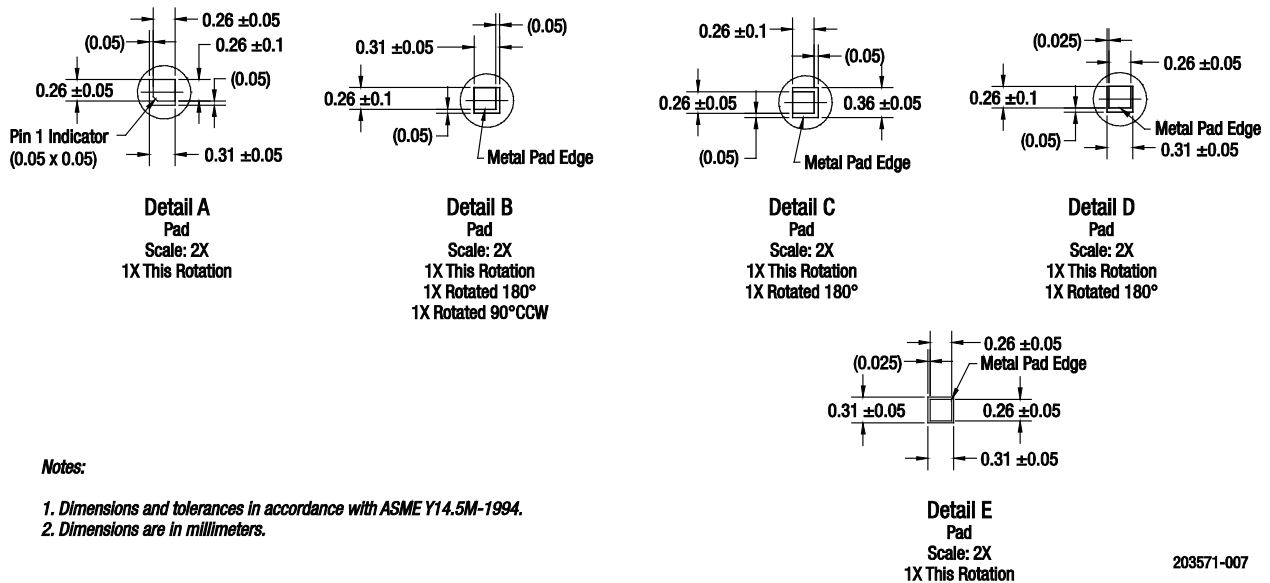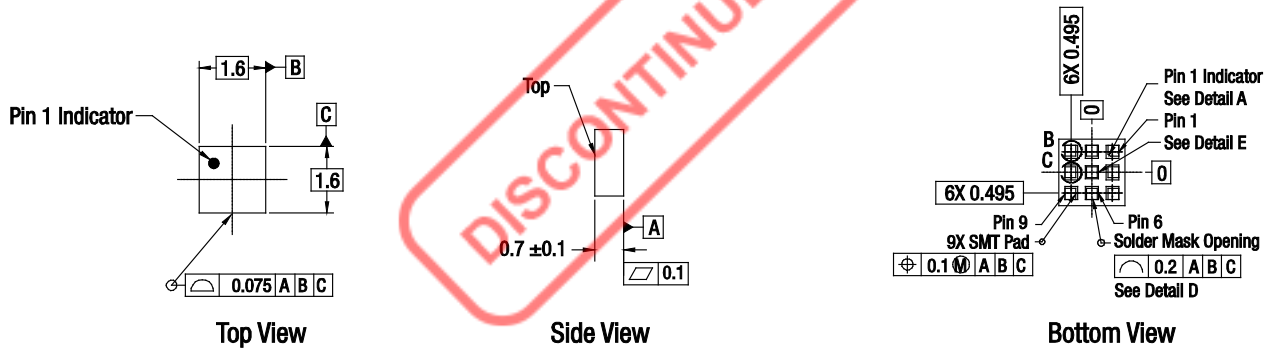


Notes:

1. Dimensions and tolerances in accordance with ASME Y14.5M-1994.
2. Dimensions are in millimeters.

Figure 7. SKY65720-11 Package Dimensions

203571-007

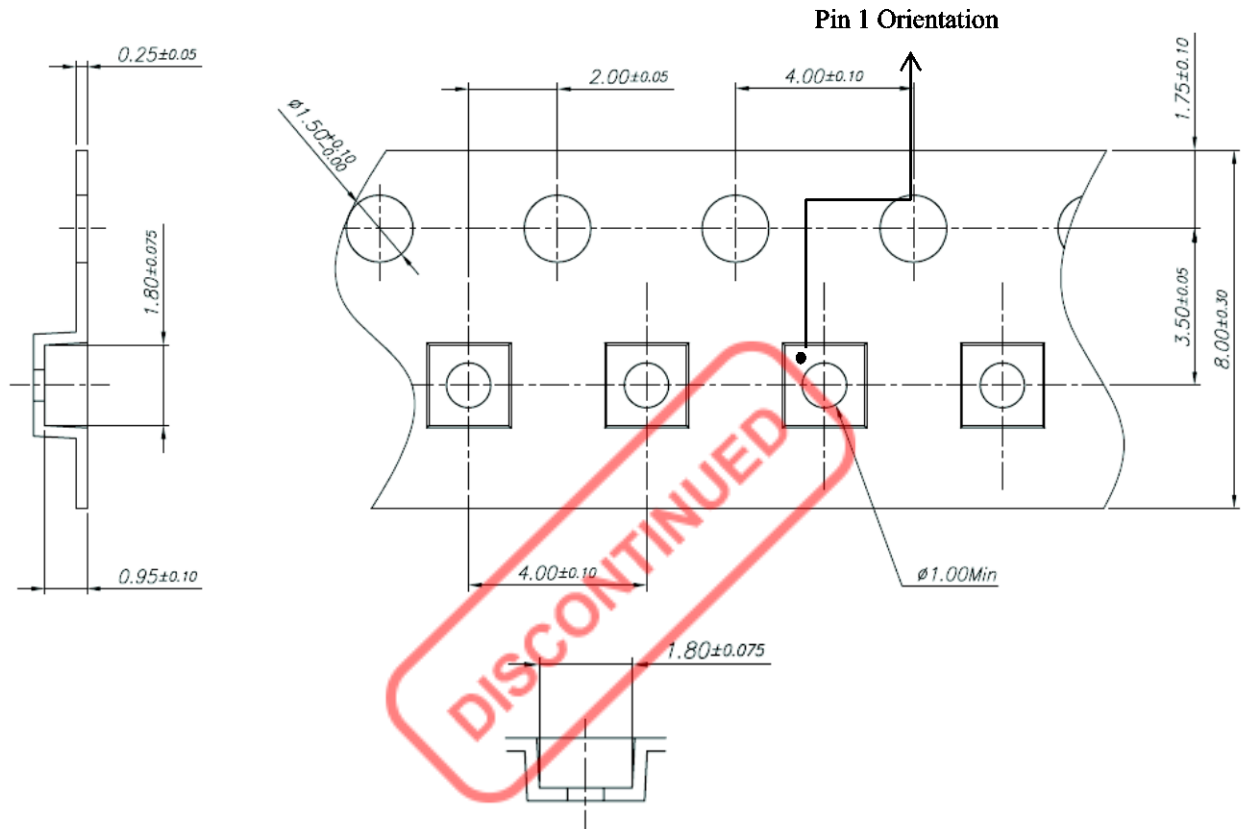

NOTES:

1. 10 sprocket hole pitch cumulative tolerance  $\pm 0.2$
2. Camber not to exceed 1mm in 250mm
3. Material: Black conductive Polystyrene
4.  $A_o$  and  $B_o$  measured on a plane 0.3mm above the bottom of the pocket
5.  $K_o$  measured from a plane on the inside bottom of the pocket to the top surface of the carrier.
6. Pocket position relative to sprocket hole measured as true position of pocket, not pocket hole.
7. Pocket center and pocket hole center must be same position.

203571-008

Figure 8. SKY65720-11 Tape and Reel Dimensions

## Ordering Information

Product Description	Product Part Number	Evaluation Board Part Number
SKY65720-11: Shielded Low-Noise Amplifier FEM with GPS/GLONASS/BDS Filter	SKY65720-11	SKY65720-11-EVB



Copyright © 2015-2017, 2026, Skyworks Solutions, Inc. All Rights Reserved.

Information in this document is provided in connection with Skyworks Solutions, Inc., and its subsidiaries (“Skyworks”) products or services. These materials, including the information contained herein, are provided by Skyworks as a service to its customers and may be used for informational purposes only by the customer. Skyworks assumes no responsibility for errors or omissions in these materials or the information contained herein. Skyworks may change its documentation, products, services, specifications or product descriptions at any time, without notice. Skyworks makes no commitment to update the materials or information and shall have no responsibility whatsoever for conflicts, incompatibilities, or other difficulties arising from any future changes.

No license, whether express, implied, by estoppel or otherwise, is granted to any intellectual property rights by this document. Skyworks assumes no liability for any materials, products or information provided hereunder, including the sale, distribution, reproduction or use of Skyworks products, information or materials, except as may be provided in Skyworks’ Terms and Conditions of Sale.

THE INFORMATION IN THIS DOCUMENT AND THE MATERIALS AND PRODUCTS DESCRIBED THEREIN ARE PROVIDED “AS IS” WITHOUT WARRANTY OF ANY KIND, WHETHER EXPRESS, IMPLIED, STATUTORY, OR OTHERWISE, INCLUDING FITNESS FOR A PARTICULAR PURPOSE OR USE, MERCHANTABILITY, PERFORMANCE, QUALITY OR NON-INFRINGEMENT OF ANY INTELLECTUAL PROPERTY RIGHT; ALL SUCH WARRANTIES ARE HEREBY EXPRESSLY DISCLAIMED. SKYWORKS DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. SKYWORKS SHALL NOT BE LIABLE FOR ANY DAMAGES, INCLUDING BUT NOT LIMITED TO ANY SPECIAL, INDIRECT, INCIDENTAL, STATUTORY, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS THAT MAY RESULT FROM THE USE OF THE MATERIALS OR INFORMATION, WHETHER OR NOT THE RECIPIENT OF MATERIALS HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGE.

Skyworks products are not designed, intended, authorized, or warranted for use or inclusion in life support or life endangering applications, devices, or systems where failure or inaccuracy might cause death or personal injury. Skyworks customers agree not to use or sell the Skyworks products for such applications, and further agree to, without limitation, fully defend, indemnify, and hold harmless Skyworks and its agents from and against any and all actions, suits, proceedings, costs, expenses, damages, and liabilities including attorneys’ fees arising out of or in connection with such improper use or sale.

Skyworks assumes no liability for applications assistance, customer product design, or damage to any equipment resulting from the use of Skyworks products outside of Skyworks’ published specifications or parameters. Customers are solely responsible for their products and applications using the Skyworks products.

“Skyworks” and the Skyworks Starburst logo are registered trademarks of Skyworks Solutions, Inc., in the United States and other countries. Third-party brands and names are for identification purposes only and are the property of their respective owners. Additional information, including relevant terms and conditions, posted at [www.skyworksinc.com](http://www.skyworksinc.com), are incorporated by reference.